

secuENTRY pro 7072 Remote

Order no.: 57190

Technical details.


Power supply	Stabilised power supply unit ¹ 5V-12V
Installation conditions	Install in a weatherproof and manipulation protected area
Reverse polarity protection	Available
Switch contact	Impulse duration 0.5-1 sec.
Compatibility	<ul style="list-style-type: none">• secuENTRY pro 7100 Cylinder• secuENTRY pro 7000 Cylinder• secuENTRY pro 7030 Half cylinder• secuENTRY pro 7071 Relay
Frequency range	Up to 3m (AES encryption)
Activation	Switching level max. 12V

¹Power supply unit not included in scope of delivery.

Areas of use.

Switching unit for the integration of external operating units, e.g. time recording, alarm systems, etc., in secuENTRY Locking systems


secuENTRY pro 7072 Remote.

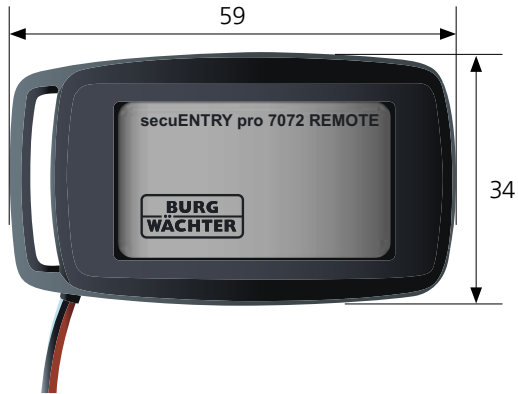

Front view



Rear view

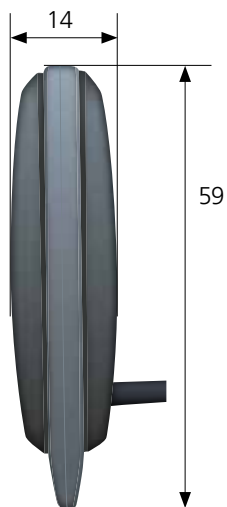

Side view

Dimensions in mm | Fig. 1:1

Product illustration.



secuENTRY Add-On

Product information.

The secuENTRY pro 7072 Remote can **exclusively** be programmed into the software via the QR code.

Scope of delivery:

- secuENTRY pro 7072 Remote
- QR code for training regarding the products
- Operating instructions

Circuit diagram:

