

## secuENTRY pro 7072 Remote

Order no.: 57190

### Technical details.


Power supply	Stabilised power supply unit <sup>1</sup> 5V-12V
Installation conditions	Install in a weatherproof and manipulation protected area
Reverse polarity protection	Available
Switch contact	Impulse duration 0.5-1 sec.
Compatibility	<ul style="list-style-type: none"><li>• secuENTRY pro 7100 Cylinder</li><li>• secuENTRY pro 7000 Cylinder</li><li>• secuENTRY pro 7030 Half cylinder</li><li>• secuENTRY pro 7071 Relay</li></ul>
Frequency range	Up to 3m (AES encryption)
Activation	Switching level max. 12V

<sup>1</sup>Power supply unit not included in scope of delivery.

### Areas of use.

Switching unit for the integration of external operating units, e.g. time recording, alarm systems, etc., in secuENTRY Locking systems


## secuENTRY pro 7072 Remote.

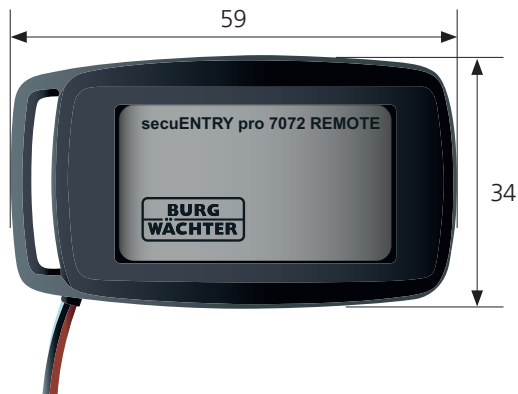

Front view



Rear view

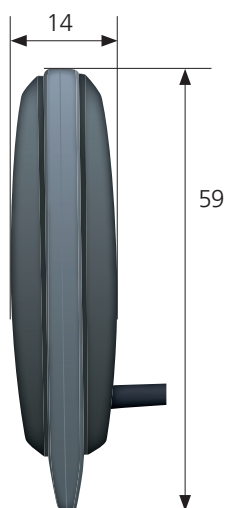

Side view

Dimensions in mm | Fig. 1:1

## Product illustration.



## Product information.

The secuENTRY pro 7072 Remote can **exclusively** be programmed into the software via the QR code.

### Scope of delivery:

- secuENTRY pro 7072 Remote
- QR code for training regarding the products
- Operating instructions

### Circuit diagram:

